


VAF-G

300/500 V. 70°C SOLID OR STRANDED CONDUCTOR

PVC INSULATED AND SHEATHED, 2 CORES WITH GROUND, FLAT TYPE

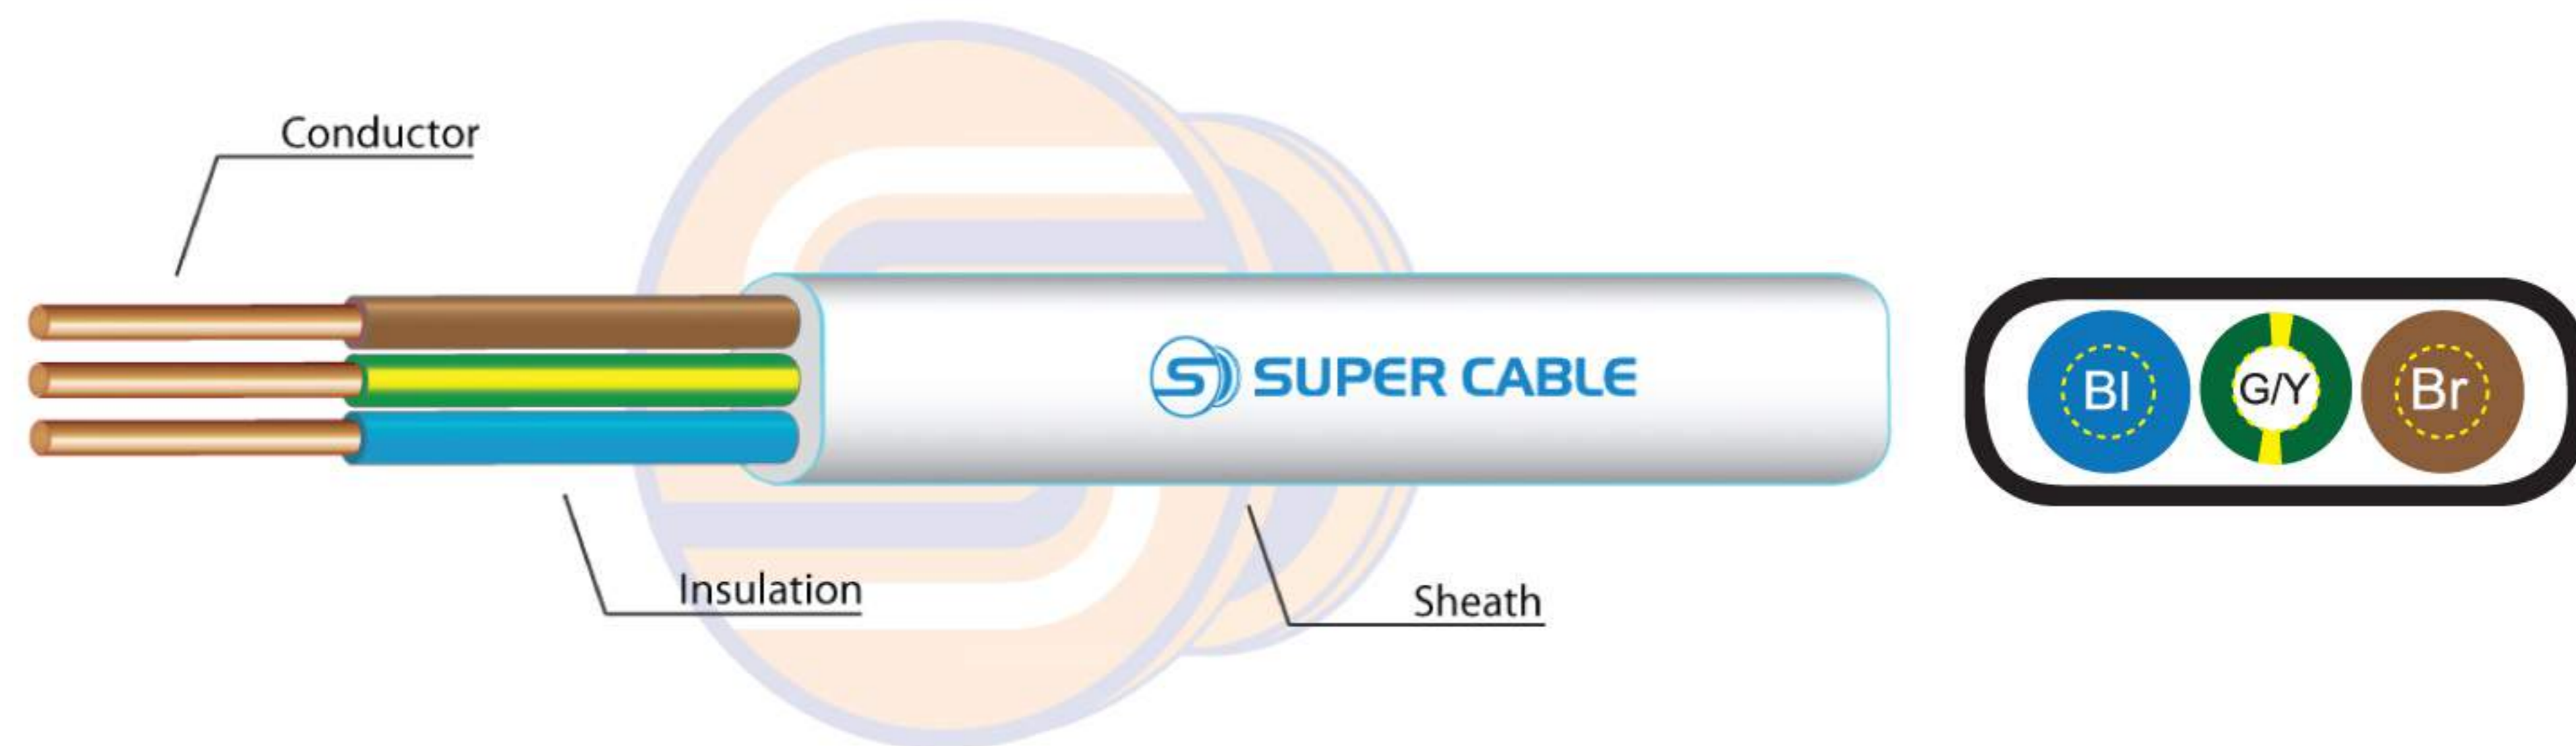

APPLICATION

- Use for surface wiring
- For installation in raceway/Do not install in conduit
- Do not install direct burial in ground

TESTING VOLTAGE : 2,000 Volts

REFERENCE STANDARD :

TIS 11-2553 PART 101, TABLE 1

CABLE STRUCTURE

CONDUCTOR : Annealed Solid or Stranded Copper

CLASS 1 & 2 Size 1 - 16 mm²

INSULATION : Polyvinyl chloride type PVC/C

SHEATHED : Polyvinyl chloride type PVC/ST4

CLASSIFICATION

Maximum Conductor Temperature : 70°C

Circuit Voltage does not exceed

300/500 Volts (U₀/U)

300 Volts between Line to Earth (U₀)

500 Volts between Line to Line (U)

Technical Data

TIS 11-2553 PART 101, TABLE 1

Nominal cross sectional area	Conductor type	Phase Core		Ground Core		Nominal insulation thickness	Nominal insulation thickness	Overall diameter		Maximum conductor resistance at 20°C	Minimum insulation resistance at 70°C	Current rating on wall at 40°C	Cable weight (approx.)	Standard packing
		Number of wires	Diameter (approx.)	Number of wires	Diameter (approx.)			minimum	maximum					
mm ²	Class	No.	mm	No.	mm	mm	mm	mm	mm	Ω/km	MΩ-km	A	kg/km	m
1/1	1	1	1.12	1	1.12	0.6	0.6	4.0 x 8.4	4.7 x 9.8	18.1	0.0110	14	75	100/C
1.5/1.5	1	1	1.37	1	1.37	0.7	0.7	4.4 x 9.8	5.4 x 11.5	12.1	0.0110	17	100	100/C
2.5/2.5	1	1	1.74	1	1.74	0.8	0.8	5.2 x 11.5	6.2 x 13.5	7.41	0.0100	23	150	100/C
4/4	2	7	2.52	7	2.52	0.8	0.8	5.8 x 13.4	7.4 x 16.5	4.61	0.0077	32	220	100/C
6/6	2	7	3.09	7	3.09	0.8	0.8	6.4 x 15.0	8.0 x 18.0	3.08	0.0065	41	290	100/C
10/10	2	7	3.99	7	3.99	1.0	1.0	7.8 x 19.0	9.6 x 22.5	1.83	0.0065	56	460	100/C
16/16	2	7	5.04	7	5.04	1.0	1.0	9.0 x 22.0	11 x 26.5	1.15	0.0052	74	650	100/C

Conductor Class 1 : Solid
2 : Stranded
C : Packing in coil

Core Color : Blue, Green/Yellow, Brown

การใช้งาน

- เดินเกาะผนัง
- เดินในช่องเดินสาย ห้ามร้อยท่อ
- ห้ามฝังดินโดยตรง

ช.พานิช
โทร. 02-115-9000
Line: @chopanich
contact@chopanich.com

www.ssupercable.com